

eltex

electrostatic
innovations



TERRACORD

Earthing cable – the safe connection

Eltex KG grounding cables are resistant to oil, petrol and many other chemical substances. They are available in many pre-assembled variants, e.g. as spiral cables.

Advantages at a glance

- › pre-assembled cables for use with all Eltex grounding components
- › also available as spiral cable with 5 or 10 m extended length.
- › standard grounding cable available in many lengths
- › robust and resistant to many chemical substances








Technical Information

Grounding cable KG	
Versions	Standard cable 1 m to 95 m in 0.5 m increments Spiral cable only 5 or 10 m long
Material	PU jacket
Operating ambient temperature	-40 ... +90°C; (-40...+194 °F)
Cable cross-section	3 x 1.5 mm ²
Cable diameter	approx. 8.5 mm
Cable parameters	Inductance: 1mH/km Capacity: 200 nF/km Electrical resistance: 10 Ohm/km
Cable color	light blue
Protection class plug coupling	IP67

Dimensions

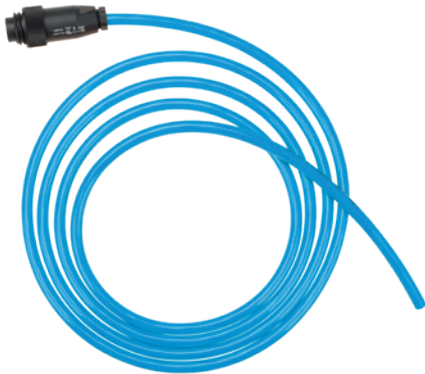

Grounding cable

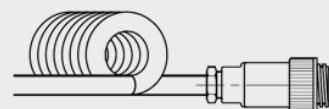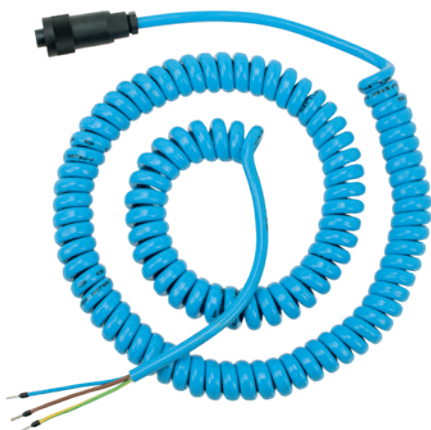

Grounding spiral cable